


Publish Date : 02.07.2019 | Rev no: 02

## PowerMAX Exterior Cat.6 U/UTP 23AWG Cable With Rod

DINTEK PowerMAX™ Category 6 4 Pair Exterior (Industrial) Aerial UTP cable, has been designed to support high speed Gigabit data transmission systems to a distance not exceeding 100mtrs.

For Outdoor or Aerial situations, this cable is part of the PowerMAX™ System range of products, that have been designed based on the PowerSum principle of crosstalk measurement and testing. We recommend that the full range of PowerMAX™ products are used in a system to maximize cabling performance, providing extended frequency response and enhanced bandwidth.

When combined as an end to end solution, the PowerMAX™ system, when installed by a certified installer can be warranted for 25yrs.

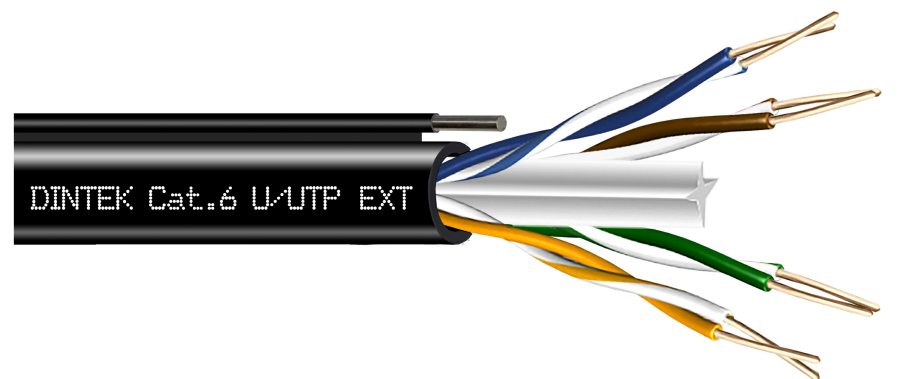

### Applications


- For Outdoor or Aerial Applications
- Voice; T1; ISDN
- 10BASE-T (IEEE 802.3)
- 16Mbps Token Ring (IEEE802.5)
- 100VG-AnyLAN (IEEE802.12)
- 100BASE-T Ethernet (IEEE802.3)
- 155/622Mbps 1.2/2.4 Gbps ATM
- 1000Mbps Gigabit Ethernet
- 550MHz Broadband Video

### Standards Conformance

- ISO/IEC11801 2nd edition CLASS E
- ANSI/TIA-568-C.2 Cabling Standard
- CENELEC EN 50173-1, CENELEC
- EN 50288-5-1, IEC 61156-5 for horizontal cable
- Flame retardancy is verified according to IEC 60332-1-2

### Performance Statistics

Frequency Mhz	Insertion Loss dB / 100mtrs	NEXT (dB)	Return Loss (dB)
1	2.0	74.3	20.0
4	3.8	65.3	23.0
10	6.0	59.3	25.0
16	7.6	56.2	25.0
20	8.5	54.8	25.0
31.26	10.7	51.9	23.6
62.5	15.4	47.4	21.5
100	19.8	44.3	32.3
150	24.9	41.4	30.8
200	29.0	39.9	18.0
250	32.8	38.3	17.3

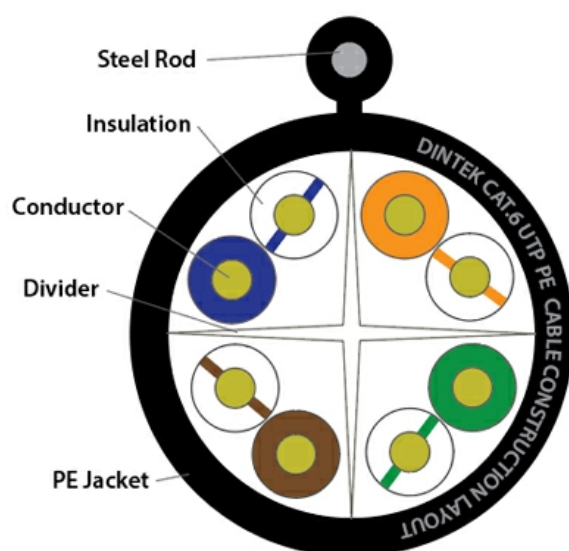

### Ordering Information

Product Number	Product Name	Jacket Type	Color	Length Qty
1101-04013	PowerMAX Exterior Cat.6 U/UTP 23AWG Cable With Rod	PE	Black	305m/Reel

## Technical Specifications

Construction		
<b>Conductor</b>		
Material	Solid Annealed Copper Wire	
Wire Size	23AWG	
<b>Insulation</b>		
Material	HDPE	
Thickness	0.22mm	
Diameter	1.01± 0.05mm	
Colors	Blue/White-Blue   Orange/White-Orange   Green/White-Green   Brown/White-Brown	
<b>Jacket</b>		
Material	PE	
Thickness	0.6mm	
Diameter	6.4±0.2mm	
Color	Black	
Self Support System	Galvanized Steel Wire - ~1.2mm	
Physical Ranges		
<b>Jacket</b>		
Min Elongation (%)	Before Aging	Jacket Unaged Elongation:Min.350%
Min. Bending Radius	25mm	
Max. Pulling Tension	25lb	
<b>Electrical</b>		
Conductor Resistance	Max. 9.38Ω/100m at 20°C	
DC Resistance Unbalance	Max. 5%	
Dielectric Strength of Insulation	DC 500V / 1min. or AC 350V / 1min.	
Insulation Resistance Test	1500MΩ-Km DC 500V (wire to ground) at 20°C	
Impedance 1~100MHz	100Ω±15% (1~250MHz)	
Impedance 100~250MHz	100Ω±15% (1~250MHz)	

DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.  
Xinzhuang Dist., New Taipei City 242  
Taiwan (R.O.C.)

P: Office: +886-2-22997898    E-mail: sales@dintek.com.tw    W: www.dintek.com.tw

1101-04013