

Publish Date : 07.06.2019 | Rev no: 02

PowerMAX+ Cat.6A U/FTP 23AWG PVC Cable

DINTEK PowerMAX+™ CAT.6A U/FTP Cable is specifically designed to support high speed network applications such as 10-Gigabit Ethernet .

The cable is constructed of 4 screened pairs and a drain wire. DINTEK PowerMAX+™ CAT.6A S/FTP cable minimizes alien crosstalk, provides excellent signal isolation and provides superior electromagnetic interference protection.



Applications

- 10GBASE-T Ethernet
- 100BASE-TX Fast Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 10BASE-TX Ethernet
- ATM CB1G
- 155/622 Mbps ATM
- 100 Mbps TP-PMD
- 100VG-AnyLAN


Standards Conformance

- ANSI/TIA-568-2.D Cat.6A
- ISO/IEC 2nd Edition 11801 Class EA
- CENELEC EN 50173-1, CENELEC EN 50288-10-1
- IEC 3rd Edition 61935-1, IEC 2nd Edition 61156-5
- Flame retardancy is verified according to IEC 60332-1-2
- RoHS compliance for the requirement of European Union issued directive 2011/65/EU.

Performance Statistics

Frequency Mhz	Insertion Loss dB / 100mtrs	NEXT (dB)	PS NEXT (dB)
1	2.1*	74.3*	72.3*
10	5.9*	59.3*	57.3*
100	19.1*	44.3*	42.3*
200	27.6*	40.8*	37.8*
250	31.1*	38.3*	36.3*
300	34.3*	37.1*	35.1*
400	40.1*	35.3*	33.3*
500	45.3*	33.8*	31.8*

The asterisked (*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula: NEXT(f MHZ) ≥ 44.3-15LOG(f MHZ/100)dB

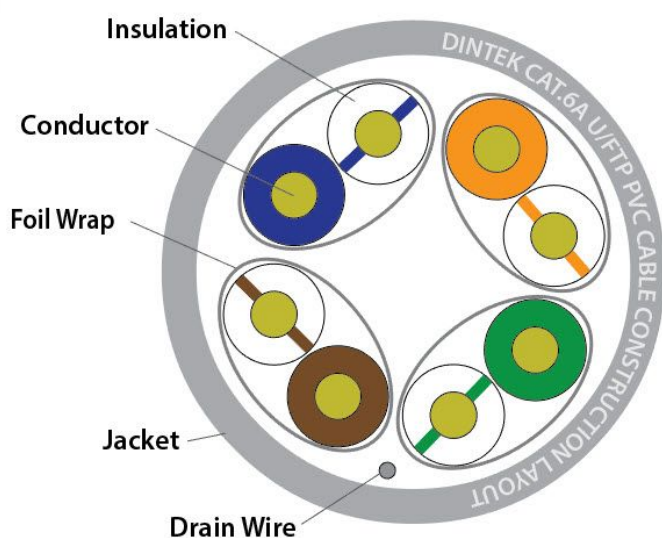

Ordering Information

Product Number	Product Name	Jacket Type	Color	Length Qty
1105-06006	PowerMAX+ Cat.6A U/FTP 23AWG PVC Cable	PVC	Gray	305m/Reel
1105-06021	PowerMAX+ Cat.6A U/FTP 23AWG LSZH Cable	LSZH	Gray	305m/Reel

Technical Specifications

Construction		
Conductor		
Material		Bare Copper
Wire Size		23AWG
Insulation		
Material		Foam-Skin PE
Thickness		Nominal:0.42
Colors		Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
Unaged Elongation (%)		Min.100%
Unaged Tensile Strength		0.816 Kgf/mm ²
Screen Material		Individual foil around each pair
Jacket		
Material		Flame Retardant PVC
Thickness		Nominal: 0.52 mm
Diameter		Nominal: 7.3 mm
Color		Gray
Drain Wire		26AWG Stranded Tinned Copper
Physical Ranges		
Insulation		
Min. Tension Strength	Before Aging	0.816 Kgf/mm ²
	After Aging	
Min Elongation (%)	Before Aging	Min.100%
	After Aging	
Jacket		
Min. Tension Strength	Before Aging	min 1.407Kg/mm ²
	After Aging	75%(PVC) at 100°C for 168Hrs
Min Elongation (%)	Before Aging	100%
	After Aging	50% at 100°C for 168Hrs
Cold Bend Test		-20 ± 20C X 4hrs no. crack
Dielectric Strength		1500 V dc/ 2 seconds
Min. Bending Radius		40mm
Max. Pulling Tension		8-10kg (25lbs)
Installation Temperature		-10°C to +60°C
Operating Temperature		-10°C to +60°C
Electrical		
Conductor Resistance		Max.9.38Ω/100m at 200C
DC Resistance Unbalance		2% MAX
Pair-to-Ground Capacitance Unbalance		Max. 160 pF/100m
Dielectric Strength of Insulation		AC 1.7 KV for 2 s
Insulation Resistance Test		Min. 5000MΩ/Km
Mutual Capacitance		Max. 5600 pF/100m
Impedance		1~500MHz:100Ω 15%

DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.
Xinzhuang Dist., New Taipei City 242
Taiwan (R.O.C.)

P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1105-06006