

Publish Date : 28.04.2019 | Rev no: 02

DINTEK 2U UTP Angled Unloaded Patch Panel

The DINTEK 2U 48 Port UTP Angled Unloaded Patch Panel provides for fast and reliable installation by accelerating module mounting times, and cable tie-down operations.

The panel is designed to accept the DINTEK Cat.5e, Cat.6 and Cat.6A Unshielded RJ45 ezi-Jacks which snap in place easily. The unique construction provides a finished product that has major advantages in cabinets with reduced space allowing for patching to move out the side mounted management instead of requiring the use of management panels taking up space. It is also excellent for use in Datacenter applications where port density and space is at a premium.

Applications



- Voice; T1; ISDN
- 10BASE-T (IEEE 802.3)
- 100BASE-T Ethernet(IEEE802.3)
- 1 Gigabit Ethernet
- 10 Gigabit Ethernet

Features

- For use in Datacenters and reduced space cabinets
- Accepts all DINTEK ezi-JACK™ Categories
- UL, ETL Listed
- Can be purchased bundled with rear management

Standards

- Industry Standards: EIA/ECA-310-E
- UL 1863 Safety Listed

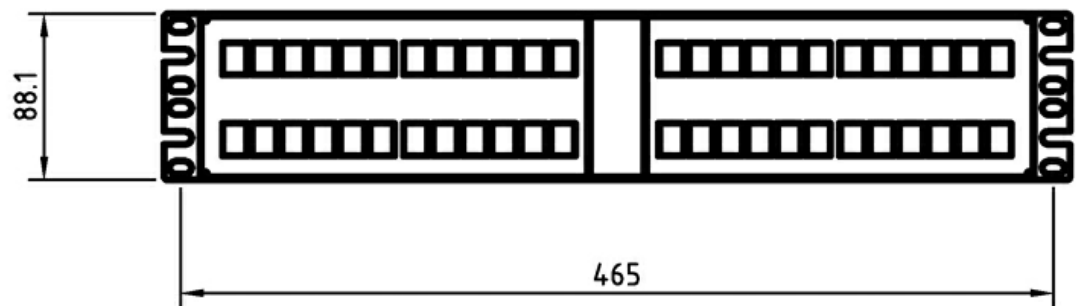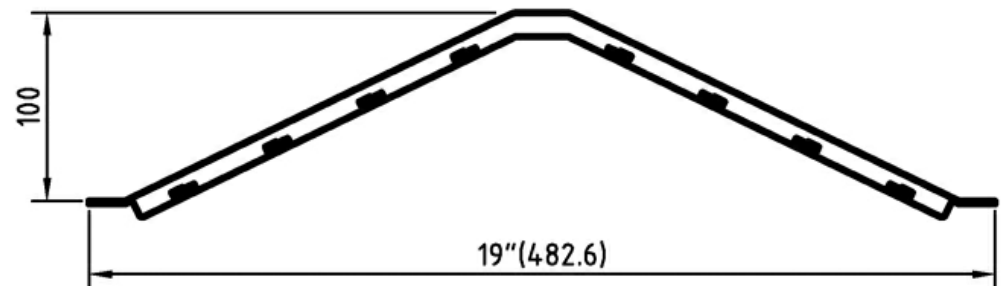

Physical Characteristics

- Color: Black
- Panel Finish: Textured Paint Coating
- Panel Thickness: 1.6 mm
- Material: Metal SPCC 1.6t
- Panel Height: 88.1 mm
- Panel Width: 482 mm

Ordering Information

Product Number	Product Name	UTP / STP	Size	Ports
1406-00050	DINTEK 2U UTP Angled Unloaded Patch Panel	Unshielded	2U	48
1406-00049	DINTEK 1U UTP Angled Unloaded Patch Panel	Unshielded	1U	24
1406-00048	DINTEK 0.5U UTP Angled Unloaded Patch Panel	Unshielded	0.5U	24

DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.
Xinzhuan Dist., New Taipei City 242
Taiwan (R.O.C.)

P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1406-00050