


Publish Date : 28.03.2019 | Rev no: 01

PowerMAX+ Cat.6A ezi-JACK Vertical Jack

DINTEK PowerMax+™ CAT.6A Unshielded ezi-JACK180™ offers superior alien crosstalk suppression, excellent insertion loss, and provides enhanced electromagnetic interference (EMI) protection by utilizing robust high impact plastic construction.

The connector is dual color coded for either 568A or 568B wiring schedules. Being specifically designed for high-speed data transmission, the DINTEK PowerMax+ CAT.6A Unshielded ezi-JACK180™ is also backwards compatible with Cat.6 and Cat.5e systems.

Combined with other DINTEK PowerMAX+™ products, they are the perfect solution to your voice and data communications needs.

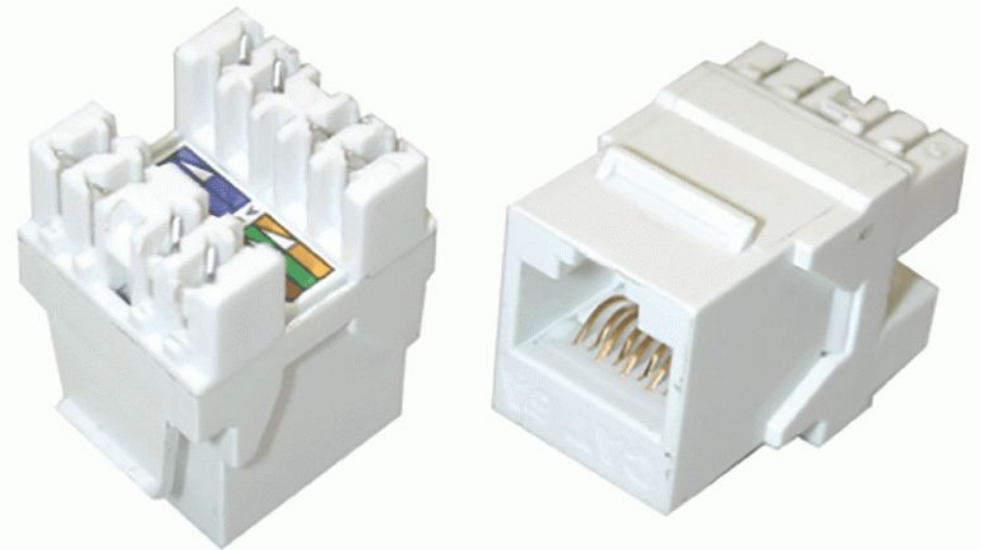

Features

- Meet ANSI/TIA-568-C.2 Cat.6A 15M Short Link requirements.
- IDC connector with large space of each pair to improve crosstalk.
- Comply with FCC part 68 and IEC 60603-7
- Wiring: T568A/B



Applications

- Voice; T1; ISDN
- 10GBASE-T
- 16Mbps Token Ring (IEEE802.5)
- 100VG-AnyLAN (IEEE802.12)
- 100BASE-T Ethernet (IEEE802.3)
- 155/622Mbps 1.2/2.4 Gbps ATM
- 1000Mbps Gigabit Ethernet
- 550MHz Broadband Video

Standards Conformance

- UL Verified
- ISO/IEC11801 2nd edition
- ANSI/TIA Standard 568-2.D
- CENELEC EN 50173

Ordering Information

Product Number	Product Name	Orientation	Color	Std Pkg Qty
1305-05009	PowerMAX+ Cat.6A ezi-JACK Vertical RJ45 Jack	Vertical	White	1pcs/PE Bag

Technical Specifications

Construction		
Body		
Connector Housing	High-impact, Flame-Retardant Plastic	
Standard	UL94V-0 rated	
Front Connection		
Contact Type	Spring Wire	
Material	Phosphor Bronze Alloy Plated with 50 micro-inch of Gold over 70~100 micro-inch of Nickel	
Rear Terminals		
Terminal Type	IDC	
Material	Phosphor Bronze Alloy with 100 micro-inch 100% Sn Alloy	
Physical Ranges		
Temperature Range		
	Storage	-40 to +70°C
	Operational	-10 to +60°C
Relative humidity		
	Operational	Max. non-condensing 93%
Retention	30lbs min between the jack and plug	
Insertion/Extraction life	750 cycles minimum	
Number of IDC terminations	200 minimum	
Total Mating Force	800 grams for 8 wire leads MIN	
Electrical		
Insulation Resistance	500 MΩ min.@ 100V d.c	
Dielectric Withstanding Voltage	1000V, RMS, 60HZ, 1 MIN.	
Spring Wire Contact Resistance	20 mΩ Max.	
Voltage/Current Rating	1.5 Amps at 20°C	
IDC Contact Resistance	2.5 mΩ Max	

Termination Demonstration

Vertical ezi-JACK

Strip 40mm of sheath from cable using stripper	Using working base, place wires as per color spec	Make sure that twists are right up to termination points
Insert jack into ezi-TOOL with Yellow cutting blade	Squeeze handles together terminating and trimming wires	Check terminations, then place dust cap onto jack

DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.
Xinzhuan Dist., New Taipei City 242
Taiwan (R.O.C.)

P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1305-05009