

Publish Date : 11.04.2019 | Rev no: 01


# PowerMAX+ Cat.6A Toolless Shielded Jack

DINTEK PowerMax+™ CAT.6A Fully shielded toolless horizontal keystone jack offers superior alien crosstalk suppression, excellent insertion loss, and provides enhanced electromagnetic interference (EMI) protection by utilizing robust die cast zinc alloy connector body housing. The shielded connector is dual color coded for either 568A or 568B wiring schedules.

Being specifically designed for high-speed data transmission, the DINTEK PowerMax+ CAT.6A Fully shielded toolless horizontal keystone jack is also backwards compatible with Shielded Cat.6 and Cat.5e systems.

### Features

- Meet all requirements of ANSI/TIA-568-2.D for Cat.6A.
- Draft ISO/IEC 11801 amendment 2, Category 6A
- Draft ISO/IEC 60603-7
- FTP 90° High density
- Toolless, easy termination, no punch down tool needed.
- Accept 22~24AWG, stranded or solid wire
- Diecasting housing design.
- Comply with FCC part 68 Subpart F and IEC 60603-7
- Metalized cap design to reduce Alien cross talk
- Wiring: T568A/B

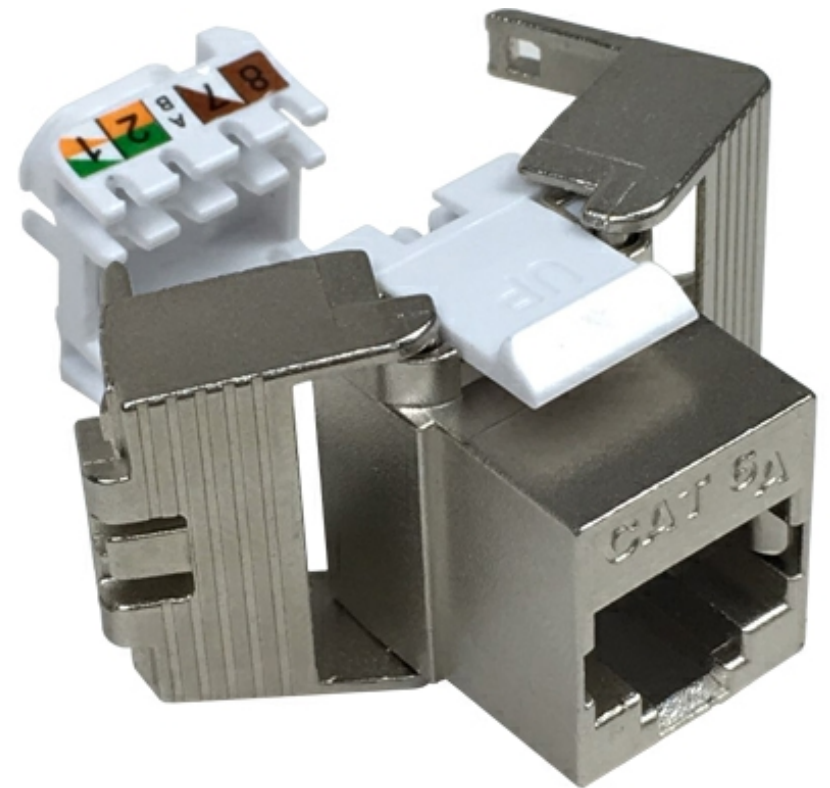


### Applications

- 10GBASE-T Ethernet]
- 100BASE-TX Fast Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 10BASE-TX Ethernet
- ATM CB1G
- 155/622 Mbps ATM
- 100 Mbps TP-PMD
- 100VG-AnyLAN
- 4/16 Mbps Token Ring
- Voice

### Standards Conformance

- UL, C(UL), ETL Verified
- ISO/IEC11801 2nd edition
- ANSI/TIA Standard 568-2.D
- CENELEC EN 50173

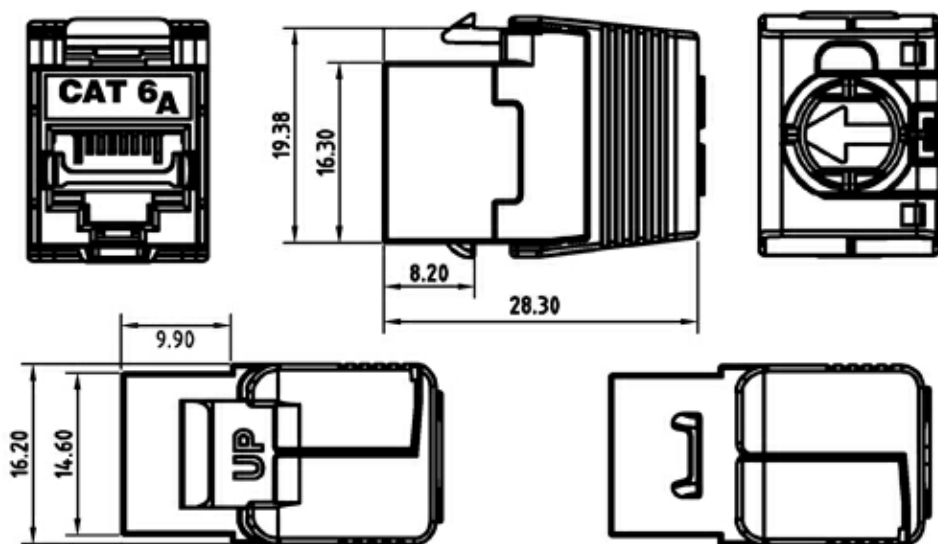

### Ordering Information

Product Number	Product Name	Orientation	Color	Std Pkg Qty
1305-05017	PowerMAX+ Cat.6A Toolless Shielded RJ45 Jack	Vertical	Silver	1pcs/PE Bag

## Technical Specifications

Construction		
<b>Body</b>		
Connector Housing	High-impact, Flame-Retardant Plastic	
Standard	UL94V-0 rated	
Shielded Body Housing	Zinc-alloy fully shielded	
<b>Front Connection</b>		
Contact Type	Spring Wire	
Material	Phosphor Bronze Alloy Plated with 50 micro-inch of Gold over 70~100 micro-inch of Nickel	
<b>Rear Terminals</b>		
Terminal Type	IDC	
Material	Phosphor Bronze Alloy with 100 micro-inch 100% Sn Alloy	
Physical Ranges		
<b>Temperature Range</b>		
	Storage	-40 to +70°C
	Operational	-10 to +60°C
Relative humidity	Max. non-condensing 93%	
Retention	Retention: 50N (11 lbf) for 60s±5s.	
Insertion/Extraction life	750 cycles minimum	
Number of IDC terminations	200 minimum	
Plug retention force	Retention: 50N for 60sec.	
Electrical		
Insulation Resistance	500 MΩ min.@ 100V d.c	
Dielectric Withstanding Voltage	1000V d.c or a.c. Peak Contact to Contact @ 60HZ for 1 minute, 1500V d.c. or a.c. Peak Contact to Panel @ 60Hz for 1 minute.	
Spring Wire Contact Resistance	20 mΩ Max.	
Voltage/Current Rating	1.5 Amps at 20°C	
IDC Contact Resistance	2.5 mΩ Max	

## Termination Demonstration

Strip 40mm of sheath from cable using stripper	Roll back the braid or drain wire onto cable so it is out of the way.	Separate the four pairs and remove the foil wrap from around each pair.
Insert the wires through the back of the wire forming cap	Lay the wires into their correct configuration, either T568A or T568B	Using side cutters, cut the wires level with the wire forming cap
Inset the wire forming cap into the rear of the	Roll back the braid or drain wire so it will fit under the jack	The finished connector should not show any wires at the

### DINTEK Electronic Limited

5F., No.8, Ln. 97, Wugong Rd.  
Xinzhung Dist., New Taipei City 242  
Taiwan (R.O.C.)

P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1305-05017