


# EM Standalone Fingerprint Controller



PFP-8021




## Features

- Easy install and operation.
- Multiple identification: **Fingerprint**, **PIN** and **card** together.
- 500 Dpi hidden fingerprint sensor for dry fingerprint and strong sunshine.
- Easy operation for register and delete without software management.

## Specifications

- Operation voltage : 12VDC
- Standby current :  $\leq 60\text{mA}$
- Operating current :  $\leq 120\text{mA}$
- Authentication : Fingerprint, PIN, EM card
- Fingerprint recognition speed :  $\leq 1\text{S}$
- Fingerprint : 500
- Card : 500
- PIN : 500
- Output : Electric lock, Alarm, Bell
- False Rejection Rate(FRR) :  $< 0.01\%$
- False Acceptance Rate(FAR) :  $< 0.0001\%$
- Operating humidity : 20%~60%
- Operating temperature :  $0^{\circ}\text{C}\sim 45^{\circ}\text{C}$
- Dimensions : 88(L) x 88(W) x 30(H)mm

## Dimensions: mm

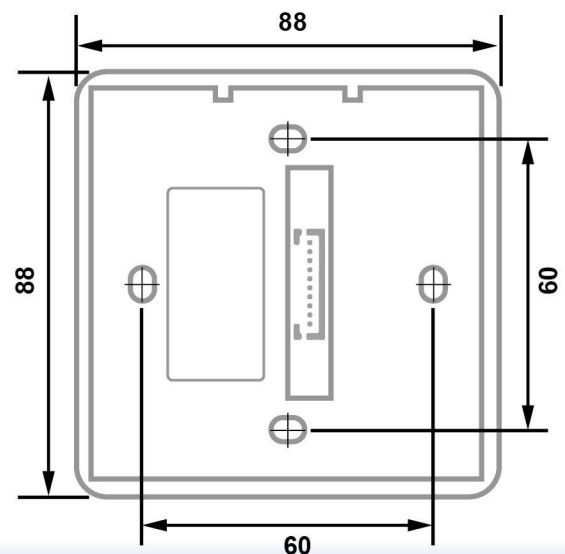

## PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

Fax : 886-2-82280191

E-mail : [pongee@pongee.com.tw](mailto:pongee@pongee.com.tw)

Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



20190819